

1U RACK HANDLE

SPECIFICATIONS:

HANDLES

DESCRIPTION: EIA-310 compliant 1U rack handle with captive screws to secure enclosure to rack

MATERIAL: Bayer Bayblend PC/ABS polymer

RATED STRENGTH: 50lbs per handle

BREAKING STRENGTH: 110lbs typical, straight pull

FLAMMABILITY: NEBS compliant UL94 V-0, IEC 60335-1

ECOLABELS: RoHS 3, REACH, Blue Angel, Nordic Swan, TCO, WEEE

CAPTIVE SCREWS

DESCRIPTION: ANSI #10-32 captive phillips pan head

MATERIAL: 18-8 stainless steel





MOUNTING SCREWS

DESCRIPTION: #8-16x1/2" flat head plastite thread forming


MATERIAL: zinc plated steel

SCOPE OF SUPPLY

The kit part number includes 2 handles, 4 mounting screws and 4 captive screws packaged with mounting instructions.

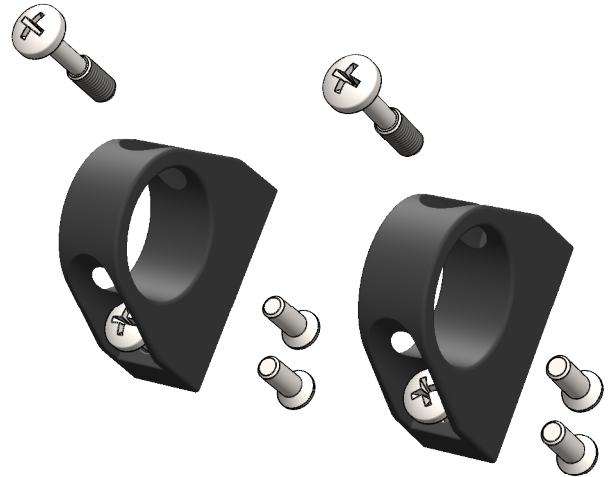


DIMENSIONS
IN INCHES
TOLS: $\pm .01$

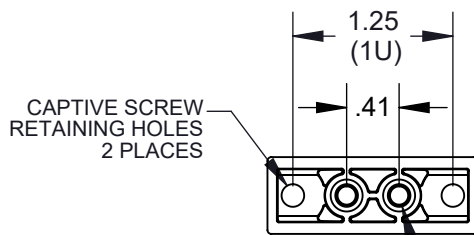

HANDLE MOUNTING
HOLES, .45" DEEP
2 PLACES

KIT PART NUMBERS			
PANEL THICKNESS	SCREW STYLE	"L"	PART NO.
.059-.090"	PHIL PN HD	.435"	3001-059
.100-.134"	PHIL PN HD	.485"	3001-100
.160-.190"	PHIL PN HD	.535"	3001-160
.375 \pm .015"	PHIL PN HD	.750"	3001-375

Part numbers shown ensure complete screw engagement with tapped or cage-nut style rack rails. For dedicated tapped rail applications a shorter screw may be used.
Example: 3001-059 will work with a .125" panel and tapped rails.

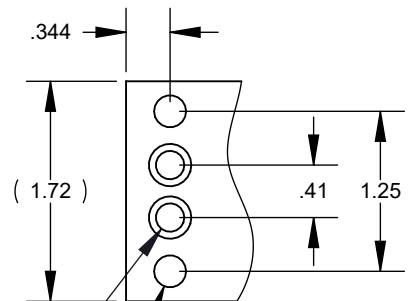

2X $\phi .194$ THRU
 $\phi .33 \times 82^\circ$
($\phi .33 \nabla .13$ ON .375" PANEL)

RECOMMENDED
MOUNTING HOLES
REAR SIDE OF 1U PANEL
TOLS: $\pm .005$

2X $\phi .25$ THRU

PITON
engineering